




Double acting plough overturning valve

Hydraulic symbol / Simbolo idraulico

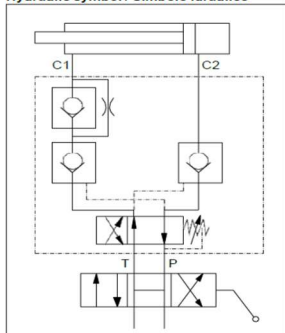

Dimensions / Dimensioni (mm)

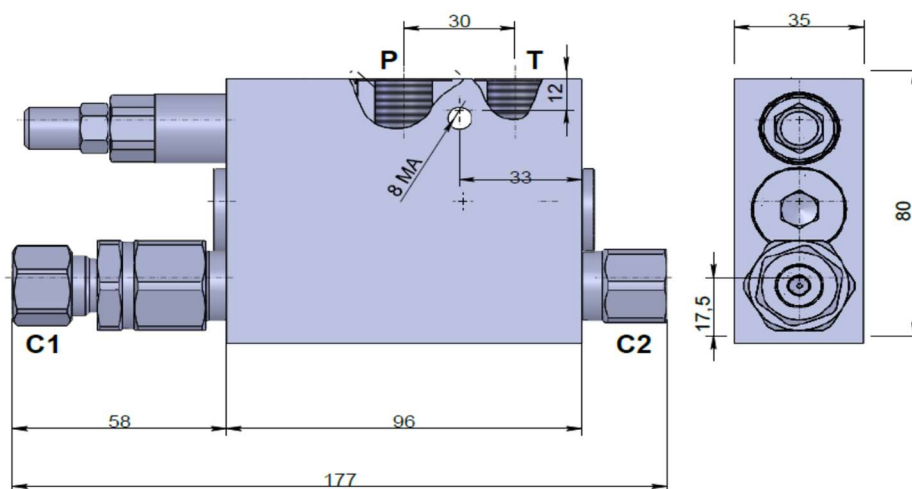

Technical Data / Dati Tecnici

Fluid viscosity	Viscavit� Fluida	10-550mm ² /s
Filtration	Classe di contaminazione	ISO code 16/13
Fluid Temperature	Temperatura fluido	-20°C +90°C
Ambient temperature	Temperatura ambiente	-20°C +50°C
Exchange pressure	Pressione csambio	250 Bar
Max. operating pressure	Pressione di lavoro max	400 Bar
External surface	Superficie esterne	Zinc plated / Zincate
standard seals	Guarnizioni standard	NBR 70 Shore A

How to order / Come ordinare

HV-C-01-00--1-01-X**

40 = Cilinder   40/50

60 = Cilinder   60/80

80 = Cilinder   80/100

Standard code Codice standard	Thread/Filetto P-T-C2	C1	Weight/Peso (kg)	cylinder � � cilindro
HVC0100 40 101X	3/8	�12	2.13	40/50
HVC0100 60 101X	3/8	�12	2.13	60/80
HVC0100 80 101X	3/8	� 12	2.13	80/100